



TMX AUSTRALIA EXCHANGE

CXA

Multicast Depth of Book (PITCH) Specification

Version 1.0.13

3 August 2026





Contents

1. Introduction.....	5
1.1. Overview	5
1.2. Feed Connectivity	6
1.3. Symbol Ranges, Units, and Sequence Numbers	8
1.4. Gap Request Proxy and Message Retransmission.....	8
1.5. Spin Servers	9
2. Protocol	10
Message Format.....	10
Data Types	10
Message Framing	10
Sequenced Unit Header	11
Heartbeat Messages	11
Execution IDs and Order IDs.....	12
Execution IDs	12
Order IDs	12
3. PITCH Messages	13
Unit Clear	13
Trading Status	13
Add Order Message	14
Start of Day Handling of Multi-Day Orders	15
Order Modification Messages	15
Order Executed Message.....	15
Order Executed at Price Message.....	16
Reduce Size Message.....	17
Modify Order Message	17
Delete Order Message	18
Trade Message.....	18
Trade Break Message	20
Calculated Value Message.....	21
End of Session.....	21
Auction Update.....	21
Auction Summary.....	22
4. Gap Request Proxy Messages	23
Login	23



Login Response	23
Heartbeat	24
Gap Request	24
Gap Response	24
Gap Server Usage Example	25
5. Spin Messages	28
Login	28
Login Response	28
Heartbeat	28
Spin Image Available	28
Spin Request	28
Spin Response	29
Spin Finished	29
Spin Server Usage Example	29
6. Message Types	31
Gap Request Proxy Messages	31
Spin Server Messages	32
PITCH Messages	32
7. Example Messages	33
Individual Messages	33
Login Message	33
Login Response Message	33
Gap Request Message	33
Gap Response Message	33
Unit Clear	33
Trading Status	34
Add Order	34
Order Executed	34
Reduce Size	34
Modify Order	35
Delete Order	35
Trade (On-Exchange Electronic Execution)	35
Trade (Off-Exchange Trade Report)	35
Trade Break	36
Calculated Value	36



End of Session.....	36
Order Entry Examples	37
Modify Order Example	37
Undisclosed Order Execution Example.....	37
Iceberg Order Execution Example	38
Iceberg Order Replenished Example.....	38
8. Multicast Configuration	39
Production Environment Configuration.....	39
Limitations/Configurations.....	39
Unit/Symbol Distribution	40
CXA Multicast Routing Parameters	40
CXA Address/Unit Distribution	40
Certification Environment Configuration.....	41
Unit/Symbol Distribution	41
Certification Multicast Routing Parameters	41
CXA Address/Unit Distribution	41
9. Connectivity.....	42
Supported Extranet Carriers.....	42
Bandwidth Recommendation.....	42
Revision History.....	43
Contact us for more information	44



1. Introduction

1.1. Overview

This specification is the standard Multicast Depth of Book (PITCH) specification for the CXA platform.

Clients may use the Multicast PITCH protocol to receive real-time trading information directly from CXA. The Multicast PITCH protocol provides symbol information, real-time depth of book quotations, and execution information direct from CXA.

CXA PITCH cannot be used to enter orders. For order entry, refer to the appropriate CXA FIX or BOE Specification.

All versions of the Multicast PITCH feed will be Gig-shaped and will be available from one or both CXA datacentres. Clients may choose to take one or more of the following Multicast PITCH feeds depending on their location and connectivity to CXA.

Multicast PITCH Feed Descriptions:

Shaping	Served From Data Centre (Primary/Secondary)	Multicast Feed ID
Gig	Primary	AAM – Feed A
Gig	Primary	ABM – Feed B
Gig	Secondary	AEM – Feed E



1.2.Feed Connectivity


PITCH feeds are available to clients who connect to CXA via cross-connect, dedicated circuit, or a supported carrier.

Clients with sufficient connectivity may choose to take both the A and B feeds from CXA's primary datacentre and arbitrate the feeds to recover lost data. Alternatively, clients may choose to arbitrate feeds from both datacentres. It should be noted that feeds from the secondary datacentre will have additional latency compared to those connected with CXA in the primary datacentre due to proximity and business continuity processing.

When arbitrating, the client can utilise the fact the redundant feeds have messages that are sequenced and process the next expected sequence from whichever feed it's received from first. The A and B feeds are created utilising distinct infrastructure, and the architecture is such that neither the A nor B feed should be expected to be advantaged relative to the other (i.e., performance should be generally equal). Any duplicate message sequence can be dropped. Arbitration reduces the chances of losing a message due to packet loss.

Multicast PITCH real-time events are delivered using a published range of multicast addresses divided into units, each with a unique range of symbols. A TCP/IP connection to one of CXA's Gap Request Proxy ("GRP") servers can be used to request dropped messages. Replayed messages are delivered on a separate set of multicast ranges reserved for packet retransmission. Intraday, a spin of all open orders may be requested from a Spin Server. This allows a client to become current without requesting a gap for all messages up to that point in the day.

The following diagram is a logical representation Multicast PITCH feed message flow between CXA and a client feed handler listening to the "A", "B", and "E" instances of a unit:

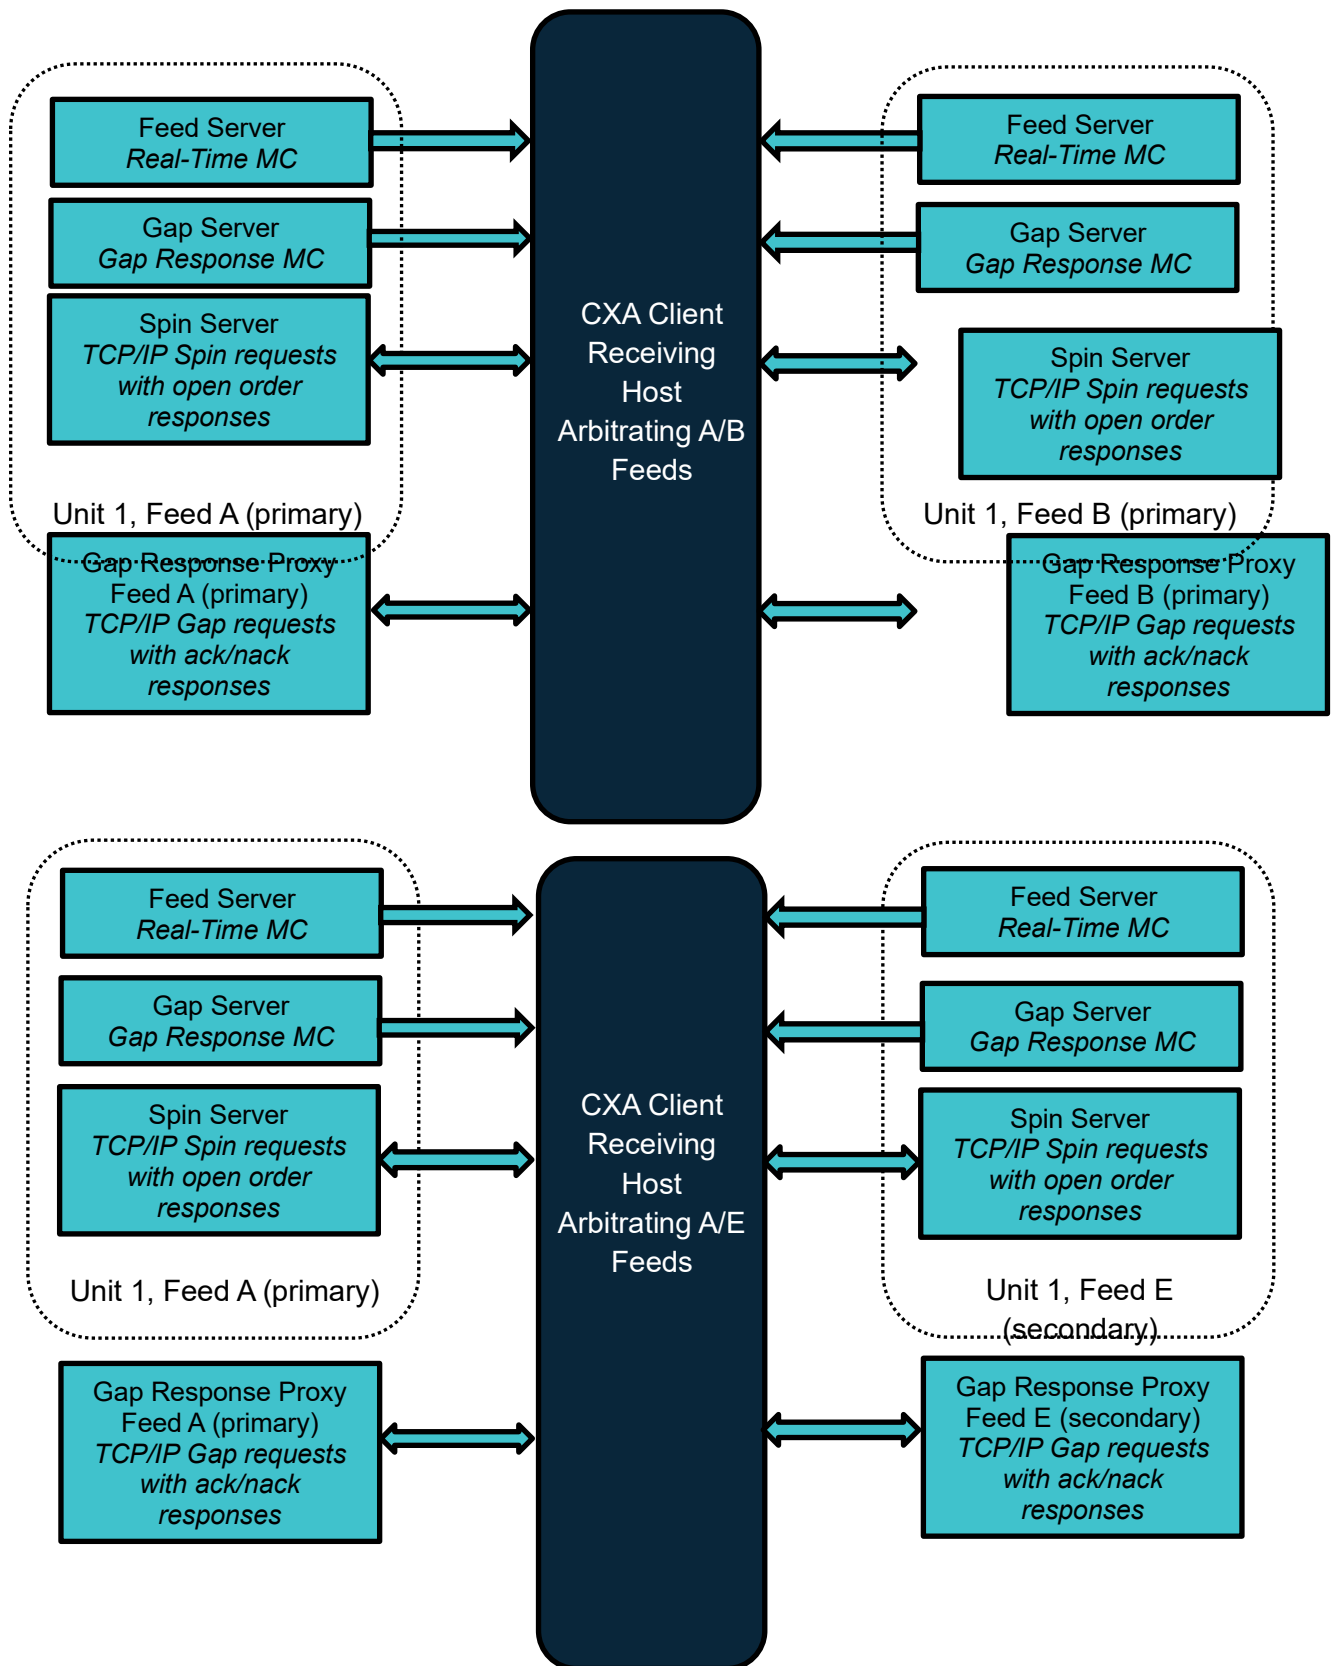



1.3. Symbol Ranges, Units, and Sequence Numbers

Symbols will be separated into units, and the [symbol distribution](#) will not change intra-day. CXA does, however, reserve the right to add multicast addresses or change the symbol distribution. Clients will be notified and provided sufficient time to conform with the changes. Care should be taken to ensure that address changes, address additions, and symbol distribution changes can be supported easily.

Message sequence numbers are incremented by one for every sequenced message within a particular symbol unit. It is important to understand that one *or more* units will be delivered on a single multicast address. As with symbol ranges, unit distribution across multicast addresses will not change intra-day but may change after notice has been given.

Symbol distribution across units as well as unit distribution across multicast addresses are identical for real-time and gap response multicast addresses.

1.4. Gap Request Proxy and Message Retransmission

Requesting delivery of missed sequenced data is achieved by establishing a TCP connection to a CXA GRP port and then receiving requested messages on designated gap recovery multicast addresses. Clients who do not wish to request missed messages do not need to connect to a GRP port for any reason or listen to the multicast addresses reserved for message retransmission. Clients choosing to request missed data will need to connect to their assigned GRP port, log in, and request gap ranges as necessary. All gap requests will be responded to with a Gap Response message. A Gap Response *Status* code of "A" (accepted) signals that the replayed messages will be delivered via the appropriate gap response multicast address. Any other Gap Response *Status* code will indicate the reason that the request cannot be serviced.

The GRP limits gap requests by message count, frequency, and age. Gap requests will only be serviced if they are within a defined sequence range of the current multicast sequence number for the requested unit. Clients will receive a total daily allowance of gap requested messages. In addition, each client is given renewable one-second and one-minute gap request limits. If the gap allowances are exceeded the gap request will be rejected as defined in section 0. The client can then wait until the time-based gap request limits reset or perform a spin as defined in section 1.5. If the daily allowance of gap requests is exceeded the client must perform a spin.

If overlapping gap requests are received within a short period of time all requests will receive a successful Gap Response message from the GRP, but the gap server will send the union of the sequence ranges across grouped gap requests. Clients will receive gap responses for their requested unit/sequence/count, but receivers should be prepared for the gap responses to be delivered via multicast in non-contiguous blocks.

Gap acknowledgements or rejects will be delivered to clients for every gap request received by the GRP. Clients should be prepared to see replayed multicast data before or after the receipt of the gap response acknowledgement from the GRP.

[Section 4.6](#) shows an example flow of messages between a client and CXA's Multicast PITCH feed, Gap Server, and Gap Request Proxy.



1.5. Spin Servers

A Spin Server is available for each unit. The server allows clients to connect via TCP and receive a spin of the current order book and symbols on that unit. By using the spin, a client can get the current CXA book quickly in the middle of the trading session without worry of gap request limits. The Spin Server for each unit is assigned its own address and/or TCP port.

Upon successful login and periodically thereafter, a Spin Image Available message is sent which contains a sequence number indicating the most recent message applied to the book. Using a Spin Request message, a client may request a spin for the orders up to a sequence number noted within one of the *last ten* Spin Image Available messages distributed. If the Spin Request submitted does not present a sequence number that matches one of the last ten Spin Image Available messages distributed, the spin will return orders up to the next closest sequence number reported through a Spin Image Available message that is greater than the sequence number requested.

In the case a client sends a sequence number in a Spin Request that is higher than the sequence number reported by the most recent Spin Image Available message, the next spin image to be generated will be returned when it is available. If the requested sequence number is still higher at that time, an "O" (Out of Range) error will be generated.

A spin consists only of Trading Status, Add Order, Calculated Value and **Auction Update** messages. Trading Status messages will be sent in spins for all symbols that are not "C"losed, which results in at least one message for every symbol that has not been "C"losed since system start-up. Spins will not contain any message for an order which is no longer on the book. While receiving the spin, the client must buffer multicast messages received. If the Spin Image Available message sequence number is the client's reference point, multicast messages with larger sequence numbers should be buffered. If a non-Spin Image Available sequence number is the client's reference point which they send in their Spin Request, they should buffer from that point on. However, the client should then disregard all messages from the feed server that are not greater than the sequence number in the Spin Response. When a Spin Finished message is received, the buffered messages must be applied to the spun copy of the book to bring it current.

[Section 5.8](#) shows an example flow of messages between a client and CXA Multicast PITCH feed and Spin Server.

Clients are required to send Heartbeat messages to CXA no less than every 5 seconds, even while a spin response is in progress. Failure to do so is the most common cause of client difficulties while processing spin responses, especially during periods of high market activity. CXA recommends that clients send a heartbeat every second to stay well within this heartbeat requirement.



2. Protocol

CXA Clients may use the PITCH protocol over multicast to receive real-time full depth of book quotations and execution information direct from CXA.

Message Format

The messages that make up the PITCH protocol are delivered using the Sequenced Unit Header which handles sequencing and delivery integrity. All messages delivered via multicast as well as to/from the Gap Request Proxy ("GRP") will use the Sequenced Unit Header for handling message integrity.

All UDP delivered events will be self-contained. Developers can assume that UDP delivered data will not cross frame boundaries and a single Ethernet frame will contain only one Sequenced Unit Header with associated data.

TCP/IP delivered events from the GRP may cross frames as the data will be delivered as a stream of data with the TCP/IP stack controlling Ethernet framing.

The PITCH feed is comprised of a series of dynamic length sequenced messages. Each message begins with *Length* and *Message Type* fields. CXA reserves the right to add message types and grow the length of any message without notice. Clients should develop their decoders to deal with unknown message types and messages that grow beyond the expected length. Messages will only be grown to add additional data to the end of a message.

Data Types

The following field types are used within the Sequenced Unit Header, GRP messages, Spin Server messages, and PITCH.

- **Alphanumeric** fields are left justified ASCII fields and space padded on the right.
- **Binary** fields are unsigned and sized to "Length" bytes and ordered using Little Endian convention (least significant byte first).
- **Binary Price** fields are unsigned Little Endian encoded 8 byte binary fields with 7 implied decimal places (denominator = 10,000,000).
- **Bit Field** fields are fixed width fields with each bit representing a Boolean flag (the 0 bit is the lowest significant bit; the 7 bit is the highest significant bit).
- **Printable ASCII** fields are left justified ASCII fields that are space padded on the right that may include ASCII values in the range of 0x20 – 0x7e.
- **Binary UTC Timestamp** are 8 byte unsigned Little Endian values representing the number of nanoseconds since the epoch (00:00:00 UTC on 1 January 1970).

Message Framing

PITCH messages will be combined into a single UDP frame where possible to decrease message overhead and total bandwidth. The count of messages in a UDP frame will be communicated using the Sequenced Unit Header. Framing will be determined by the server for each unit and site. The content of the multicast across feeds (e.g., A/B) will be identical, **but framing will not**



be consistent across feeds. Receiving processes that receive and arbitrate multiple feeds cannot use frame level arbitration to fill gaps.

Sequenced Unit Header

The Sequenced Unit Header is used for all Multicast PITCH messages as well as messages to and from the Gap Request Proxy ("GRP") and Spin Servers.

Both sequenced and unsequenced data may be delivered using the Sequenced Unit Header. Un-sequenced headers will have a 0 value for the *Hdr Sequence* field and potentially for the *Hdr Unit* field. All messages sent to and from the GRP and Spin Servers are unsequenced while multicast may contain both sequenced and unsequenced messages.

Sequenced messages have implied sequences with the first message having the sequence number contained in the header. Each subsequent message will have an implied sequence one greater than the previous message up to a maximum of count messages. Multiple messages can follow a Sequenced Unit Header, but a combination of sequenced and unsequenced messages cannot be sent within one header.

The sequence number for the first message in the next frame can be calculated by adding the *Hdr Count* field to the *Hdr Sequence*. This technique will work for sequenced messages and Heartbeats.

Sequenced Unit Header				
Field	Offset	Length	Value/Type	Description
<i>Hdr Length</i>	0	2	Binary	Length of entire block of messages. Includes this header and Hdr Count messages to follow.
<i>Hdr Count</i>	2	1	Binary	Number of messages to follow this header.
<i>Hdr Unit</i>	3	1	Binary	Unit that applies to messages included in this header.
<i>Hdr Sequence</i>	4	4	Binary	Sequence of first message to follow this header.
Total Length = 8 bytes				

Heartbeat Messages

The Sequenced Unit Header with a *Hdr Count* field set to "0" will be used for heartbeat messages. During trading hours heartbeats will be sent from the GRP, Spin Server, and all multicast addresses if no data has been delivered within one second. Heartbeat messages never increment the sequence number for a unit but can be used to detect gaps on the real-time multicast channels during low update rate periods.

Heartbeats on the real-time multicast addresses during trading hours will have a *Hdr Sequence* value equal to the sequence of the next sequenced message to be sent for the unit. Heartbeats on gap multicast addresses will always have the *Hdr Sequence* field set to 0. All heartbeat messages sent to and from the GRP and Spin Server are unsequenced and should have *Hdr Sequence* and *Hdr Unit* fields set to 0.



Outside of trading hours CXA sends heartbeats on all real-time and gap channels with a sequence of 0 to help clients validate multicast connectivity. Heartbeats might not be sent outside of normal trading hours during scheduled maintenance.

CXA expects heartbeats to be sent to the GRP and Spin Servers on live connections no less than every 5 seconds. Failure to receive two consecutive heartbeats will result in the GRP or Spin Server terminating the client connection. This also applies when the client is receiving a spin from the Spin Server, the heartbeats must continue to be sent from the client to the Spin Server.

Execution IDs and Order IDs

Execution IDs and Order IDs that are reported in PITCH may be converted to base 36 and then matched to Execution IDs and Order IDs that are received over FIX or BOE acknowledgements. Conversion rules and examples are provided to allow for clients to match these ID types.

Execution IDs

Convert to nine-character, base 36, zero-padded on the left. Binary values represented in Little Endian format.

Binary Value (Hex)	Decimal (base 10)	CXA Base36 Value
24 45 20 30 15 00 00 00	91001734436	015T02ZOK
8B 0F FF 6E 27 00 00 00	169365933963	025T03ROR

Order IDs

Convert to 12-character, base 36. No padding should be required. Binary values represented in Little Endian format.

Binary Value (Hex)	Decimal (base 10)	CXA Base36 Value
00 60 A3 58 6C 5E 29 40	288958144494319104	27174309PSLC
09 AC 22 D4 83 8A EF 22	157336438470486729	17174206VA2X



3. PITCH Messages

The PITCH messages reflect the state of CXA including the order addition, order deletion, order modification, or execution of an order in the system.

Unit Clear

The Unit Clear message instructs feed recipients to clear all orders for the CXA book in the unit specified in the Sequenced Unit Header. It would be distributed in rare recovery events such as a datacentre fail-over.

Unit Clear				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field.
<i>Message Type</i>	1	1	0x97	Unit Clear Message
<i>Reserved</i>	2	4	Binary	Reserved (undefined)
Total Length = 6 bytes				

Trading Status

The Trading Status message is used to indicate the current trading status of a security. A Trading Status message will be sent whenever trading status changes for a security. The following summarises the Trading Status values in the CXA system:

- C = Closed. Not accepting orders or off-exchange trade reports. Implied at system start-up for all symbols.
- A = Pre-market. Not accepting orders, off-exchange trades may be reported.
- T = Trading. Continuous trading session open. Accepting orders and off-exchange trade reports.
- M = MOC Trading. Continuous trading session closed. Accepting only MOC orders and off-exchange trade reports.
- P = Post-market. MOC only trading session closed. Not accepting orders, off-exchange trades may be reported.
- H = Halted. Not accepting orders, only eligible off-exchange trades may be reported. Existing orders may be cancelled.
- S = Trading suspended. Sent in the event trading is suspended for operational reasons. Not accepting orders, only eligible off-exchange trades may be reported. Existing orders may be cancelled.
- O = Pre-Open. Symbols eligible for the CXA Opening Auction, or are subject to an intra-day Auction, are placed into Pre-Open prior to the auction. Order entry, amends, cancels are permitted. Orders are not matched and overlapping order books may form.
- E = Pre-Close. Symbols eligible for the CXA Closing Auction are placed into Pre-Close prior to the auction. Order entry, amends, cancels are permitted. Orders are not matched and overlapping order books may form.

Halted and Trading suspended are functionally the same, though a halt is considered short term while a suspension occurs for a longer term that can persist over several days.



The *Trading Status* field will be used to represent the status of the trading session.

Trading Status				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	Length of this message including this field
<i>Message Type</i>	1	1	0x3B	Trading Status message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Symbol</i>	10	6	Printable ASCII	Symbol (right padded with spaces).
<i>Trading Status</i>	16	1	Alphanumeric	C = Closed A = Pre-market T = Trading M = MOC Trading P = Post-market H = Halted S = Trading suspended O = Pre-Open E = Pre-Close
<i>Market Id Code</i>	17	4	Alphanumeric	Market Identifier Codes: XASX = ASX Symbols CXAW = CXA Warrants CXAE = CXA ETF CXAQ = CXA QMF CXAL = CXA Listed
<i>Reserved</i>	21	1	Binary	Reserved (undefined)
Total Length = 22 bytes				

Add Order Message

The Add Order message represents a newly accepted visible or undisclosed order on the CXA book. It includes a day-specific *Order Id* assigned by CXA to the order.

Add Order				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	Length of this message including this field.
<i>Message Type</i>	1	1	0x37	Add Order Message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Order Id</i>	10	8	Binary	Day-specific identifier assigned to this order. Order Ids received on PITCH may be compared to those received on order acknowledgements in FIX or BOE by converting the decimal (base 10) value to a base 36 value. <u>Example conversion:</u> Base 10 – 1079067412513217551 Base 36 – 874XH1UZEHOV



<i>Side Indicator</i>	18	1	Alphanumeric	B = Buy Order S = Sell Order
<i>Quantity</i>	19	4	Binary	Number of shares being added to the book. For undisclosed orders, the number of shares is zero.
<i>Symbol</i>	23	6	Printable ASCII	Symbol (right padded with spaces).
<i>Price</i>	29	8	Binary Price	The display price of the order.
<i>PID</i>	37	4	Alphanumeric	Participant ID (right padded with spaces). Blank (spaces) if not attributed.
<i>Reserved</i>	41	1	Binary	Reserved (undefined)
Total Length = 42 bytes				

Start of Day Handling of Multi-Day Orders

There are no PITCH spec message spec changes for multi-day orders, however this section includes certain behaviours to note.

CXA systems will commence each daily session with no orders.

Multi-Day orders (GTC and GTD), that have persisted overnight, and have not been subject to corporate action overnight purge events, will be disseminated as Add Order messages at the start of connectivity the following day:

- Add Order messages are not guaranteed in price priority; however, price priority is determined from the order's *Price*, and
- Add Order messages are guaranteed in time priority within a given price.

Note that Multi-Day orders will be deleted at start of day if the order's expiration date is a previous non-trading day. In this event, an Add Order message will be followed by a Delete Order message.

Note that certain corporate actions result in the purging of orders overnight. In these events there will be no reference made to those cancelled orders in market data signals the following day.

Order Modification Messages

Order Modification messages refer to an *Order Id* previously sent with an Add Order message. Multiple Order Modification messages may modify a single order and the effects are cumulative. Modify messages may update the size and/or the price of an order on the book. When the remaining size of an order reaches zero, the order is dead and should be removed from the book.

Order Executed Message

The Order Executed message is sent when a visible order on the CXA book is executed in whole or in part. The execution price equals the order price found in the original Add Order message or the order price in the latest Modify Order message referencing the *Order Id*.

Order Executed				
Field Name	Offset	Length	Type/(Value)	Description



<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field.
<i>Message Type</i>	1	1	0x38	Order Executed Message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Order Id</i>	10	8	Binary	<i>Order Id</i> of a previously sent Add Order message that was executed.
<i>Executed Quantity</i>	18	4	Binary	Number of shares executed.
<i>Execution Id</i>	22	8	Binary	CXA generated day-unique execution identifier of this execution. <i>Execution Id</i> is also referenced in the Trade Break message.
<i>Contra Order Id</i>	30	8	Binary	<i>Order Id</i> of the contra order that matched with this order.
<i>Contra PID</i>	38	4	Alphanumeric	Contra Participant ID (right padded with spaces). Blank (spaces) if not attributed.
<i>Reserved</i>	42	1	Binary	Reserved (undefined)
Total Length = 43 bytes				

Order Executed at Price Message

Order Executed at Price messages are used to update lit orders that have fully or partially executed in an auction.

There is one Order Executed at Price message per auction trade, which includes the order IDs of both resting orders matched in the trade.

Each Order Executed at Price message is followed by either:

- Reduce Size message, if the contra order has partially executed, or
- Delete Order message, if the contra order has fully executed.

Please refer to the Trade message section for auction trades which involve undisclosed orders.

Order Executed at Price				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field
<i>Message Type</i>	1	1	0x58	Order Executed at Price Message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Order Id</i>	10	8	Binary	<i>Order Id</i> of a previously sent Add Order message that was executed
<i>Executed Quantity</i>	18	4	Binary	Number of shares/contracts executed
<i>Execution Id</i>	22	8	Binary	CXA generated day-unique execution identifier of this execution. Execution Id is also referenced in the Trade Break message
<i>Contra Order Id</i>	30	8	Binary	<i>Order Id</i> of the contra order that matched with this order.



<i>Contra PID</i>	38	4	Alphanumeric	Contra Participant ID (right padded with spaces). Blank (spaces) if not attributed.
<i>Execution Type</i>	42	1	Alphanumeric	O = Opening / Intra-day Auction C = Closing Auction H = Halt Auction (Re-Opening)
<i>Price</i>	43	8	Binary Price	The execution price of the order
<i>Reserved</i>	51	1	Binary	Reserved (undefined)
Total Length = 52 bytes				

Reduce Size Message

The Reduce Size message is sent when a visible order on the CXA book is partially reduced.

Reduce Size				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field
<i>Message Type</i>	1	1	0x39	Reduce Size Message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Order Id</i>	10	8	Binary	<i>Order Id</i> of a previously sent Add Order message that has been reduced.
<i>Cancelled Quantity</i>	18	4	Binary	Number of shares cancelled.
Total Length = 22 bytes				

Modify Order Message

The Modify Order message is sent whenever an open order is visibly modified. The *Order Id* refers to the *Order Id* of the original Add Order message.

Note that Modify Order messages that appear to be “no ops” (i.e., they do not appear to modify any relevant fields) will still lose priority.

Modify				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field
<i>Message Type</i>	1	1	0x3A	Modify Order Message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Order Id</i>	10	8	Binary	<i>Order Id</i> of a previously sent Add Order message that has been modified.
<i>Quantity</i>	18	4	Binary	Number of shares associated with this order after this modify (may be less than the number entered). For



				undisclosed orders, the number of shares is zero.
Price	22	8	Binary Price	The order price after this modify.
Reserved	30	1	Binary	Reserved (undefined)
Total Length = 31 bytes				

Delete Order Message

The Delete Order message is sent whenever a booked order is cancelled or leaves the order book. The *Order Id* refers to the *Order Id* of the original Add Order message.

Although not currently possible, in the future under certain circumstances an order that is deleted from the book may return to the book later. Therefore, a Delete Order message does not indicate that a given *Order Id* will not be sent again on a subsequent Add Order message. Clients should be prepared to handle this scenario.

Delete				
Field Name	Offset	Length	Type/(Value)	Description
Length	0	1	Binary	Length of this message including this field.
Message Type	1	1	0x3C	Delete Order Message
Timestamp	2	8	Binary UTC Timestamp	Nanoseconds since epoch
Order Id	10	8	Binary	Order Id of a previously sent Add Order message that has been removed from order book.
Total Length = 18 bytes				

Trade Message

The Trade message provides information about executions of non-displayed and undisclosed orders (including auction executions of undisclosed orders), on the CXA book or executions that occur off-exchange and reported to CXA. Trade messages for on-exchange electronic executions are necessary to calculate CXA execution-based data. Trade messages do not alter the book and can be ignored if messages are being used solely to build a book.

No Add Order message is sent for hidden orders, and thus, no modify order messages may be sent when hidden orders are executed. Instead, a Trade message for on-exchange electronic executions is sent whenever a hidden order is executed in whole or in part. A Trade message for on-exchange electronic executions is also sent when there is an execution against any non-displayed portion of an iceberg order. As with visible orders, hidden and iceberg orders may be executed in parts.

For auction executions of undisclosed orders, please refer to the Trade Type field.

A Trade message will be followed by a Delete Order message for fully executed undisclosed orders.

A complete view of all CXA executions can be built by combining all Order Executed and Trade messages.

Trade				
Field Name	Offset	Length	Type/(Value)	Description



<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field
<i>Message Type</i>	1	1	0x3D	Trade Message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Symbol</i>	10	6	Printable ASCII	Symbol (right padded with spaces).
<i>Quantity</i>	16	4	Binary	Incremental number of shares executed or reported.
<i>Price</i>	20	8	Binary Price	The price of the trade.
<i>Execution Id</i>	28	8	Binary	CXA generated day-unique execution identifier of this execution. <i>Execution Id</i> is also referenced in the Trade Break message.
<i>Order Id</i>	36	8	Binary	<i>Order Id</i> of the executed order.
<i>Contra Order Id</i>	44	8	Binary	<i>Order Id</i> of the contra order that matched with this order.
<i>PID</i>	52	4	Alphanumeric	Participant ID (right padded with spaces). Blank (spaces) if not attributed.
<i>Contra PID</i>	56	4	Alphanumeric	Contra Participant ID (right padded with spaces). Blank (spaces) if not attributed.
<i>Trade Type</i>	60	1	Alphanumeric	B = Broker Preferred Trade N = Trade resulting from normal matching logic <space> = Off-exchange trade report Auction executions of Undisclosed orders will include one of the following values: O = Opening / Intra-day Auction C = Closing Auction H = Halt Auction (Re-Opening)
<i>Trade Designation</i>	61	1	Alphanumeric	C = CXAC (Limit) P = CXAP (Mid-Point) N = CXAN (Near Point) F = CXAF (Far Point) M = CXAM (MOC) Valid only for on-exchange executions, space otherwise.



<i>Trade Report Type</i>	62	1	Alphanumeric	B = Block Trade P = Large Portfolio Trade T = Large Principal Transaction S = Trades with Price Improvement L = Permitted Trade During Post Trading Hours Period M = Permitted Trade During Pre-Trading Hours Period E = Out of Hours Trade F = ETF Trade Report for unit creations or redemptions Valid only for off-exchange trade reports, space otherwise.
<i>Trade Transaction Time</i>	63	8	Binary UTC Timestamp	Nanosecond timestamp of the off-exchange trade as specified in the Trade Report submitted by the trading participant. Valid only for off-exchange trade reports, zero otherwise.
<i>Flags</i>	71	1	Bit Field	Bit 0 (Value 1) Reserved Bit 1 (Value 2) Trade from converted order Bit 2 (Value 4) Reserved Bit 3 (Value 8) Reserved Bit 4 (Value 16) Reserved Bit 5 (Value 32) Reserved Bit 6 (Value 64) Reserved Bit 7 (Value 128) Reserved
Total Length = 72 bytes				

Trade Break Message

The Trade Break message is sent whenever an execution on CXA or off-exchange trade reported to CXA is cancelled. A trade correction is performed by sending a Trade Break message followed by a new Trade message with the corrected size and price. Applications that simply build a CXA book can ignore Trade Break messages.

Trade Break				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field
<i>Message Type</i>	1	1	0x3E	Trade Break Message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Execution Id</i>	10	8	Binary	CXA generated day-unique identifier of the execution that was broken. <i>Execution Id</i>



				refers to previously sent Order Executed or Trade message.
Total Length = 18 bytes				

Calculated Value Message

The Calculated Value message is sent when CXA calculates market values for a specified symbol or when a calculated market value is reported to CXA. The specified symbol may not trade on CXA, but instead could represent index or iNAV values reported to CXA from third parties as indicated by the *Value Category* field. The index values will be reported on each of the unitised CXA PITCH feeds and are not specific to an individual unit.

Calculated Value				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field
<i>Message Type</i>	1	1	0xE3	Calculated Value Message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Symbol</i>	10	6	Printable ASCII	Symbol (right padded with spaces).
<i>Value Category</i>	16	1	Alphanumeric	1 = Closing price 2 = iNAV values (ETF) 3 = Index values 4 = EOD NAV from issuer
<i>Value</i>	17	8	Binary Price	The calculated value.
<i>Value Timestamp</i>	25	8	Binary UTC Timestamp	Timestamp when the calculated value was generated in nanoseconds since epoch.
Total Length = 33 bytes				

End of Session

The End of Session message is sent for each unit when the unit shuts down. No additional sequenced messages will be delivered for this unit, but heartbeats from the unit may be received.

End of Session				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field
<i>Message Type</i>	1	1	0x2D	End of Session Message
<i>Reserved</i>	2	4	Binary	Reserved (undefined)
Total Length = 6 bytes				

Auction Update

The Auction Update message is sent during Pre-Open and Pre-Close trading states when a symbol has an order update relating to an overlapping order book (where the best bid price is



greater than or equal to the best ask price). The message includes the potential number of shares and the indicative auction price if the symbol were to undergo an auction now.

The Auction Update message is only be sent if there are updates to the *Buy Shares*, *Sell Shares*, or *Indicative Price* fields. In practice, this will be when an overlapping order book forms, or there is an update to an overlapping order book or if an order update has removed an overlapping order book scenario.

Auction Update				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field.
<i>Message Type</i>	1	1	0x59	Auction Update Message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Symbol</i>	10	6	Printable ASCII	Symbol (right padded with spaces).
<i>Auction Type</i>	16	1	Alphanumeric	O = Opening / Intra-day Auction C = Closing Auction H = Halt Auction (Re-Opening)
<i>Buy Shares</i>	17	4	Binary	Number of shares on buy side eligible to trade at the auction indicative price.
<i>Sell Shares</i>	21	4	Binary	Number of shares on sell side eligible to trade at the auction indicative price.
<i>Indicative Price</i>	25	8	Binary Price	Indicative Auction Price at which the continuous book would match.
<i>Reserved</i>	33	1	Binary	Reserved (undefined)
Total Length = 34 Bytes				

Auction Summary

The Auction Summary message is sent at the completion of the Auction per symbol and includes the Auction Price and Shares executed.

If there is no overlapping order book (where best bid price is less than best ask price) at the time of the auction, no auction trades will result, but the Auction Summary message will still be disseminated and contain zeroes in the *Price* and *Shares* fields.

Auction Summary				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	Length of this message including this field.
<i>Message Type</i>	1	1	0x5A	Auction Summary Message
<i>Timestamp</i>	2	8	Binary UTC Timestamp	Nanoseconds since epoch
<i>Symbol</i>	10	6	Printable ASCII	Symbol (right padded with spaces).
<i>Auction Type</i>	16	1	Alphanumeric	O = Opening / Intra-day Auction C = Closing Auction H = Halt Auction (Re-Opening)
<i>Price</i>	17	8	Binary Price	Auction price
<i>Shares</i>	25	4	Binary	Cumulative number of shares executed during the auction.



Reserved	29	1	Binary	Reserved (undefined)
Total Length = 30 bytes				

4. Gap Request Proxy Messages

The following messages are used for initialising a TCP/IP connection to the Gap Request Proxy ("GRP") and to request message retransmissions. Clients only need to implement the following messages if gap requests will be made. Each of the following message types must be wrapped by an unsequenced Sequenced Unit Header as described in Section 0. The following messages will not be delivered using multicast.

Clients are advised to login to the GRP service at start of day in readiness to request the recovery of gaps as they occur. Please note that the recoverable window of messages advances throughout the day.

Login

The Login message is the first message sent to the GRP by the client process after the connection to the GRP is established. Failure to login before sending any other message type will result in the connection being dropped by the GRP.

Login				
Field	Offset	Length	Value/Type	Description
Length	0	1	Binary	Length of this message including this field.
Message Type	1	1	0x01	Login Message
SessionSubId	2	4	Alphanumeric	SessionSubId supplied by CXA.
Username	6	4	Alphanumeric	Username supplied by CXA.
Filler	10	2	Alphanumeric	(space filled)
Password	12	10	Alphanumeric	Password supplied by CXA.
Total Length = 22 bytes				

Login Response

The Login Response message is sent by the GRP to the client process in response to a Login message. The *Status* field is used to reflect an accepted login or the reason the session was not accepted. If login fails, the connection will be dropped after the Login Response message is sent.

Login Response				
Field	Offset	Length	Value/Type	Description
Length	0	1	Binary	Length of this message including this field.
Message Type	1	1	0x02	Login Response Message
Status	2	1	Alphanumeric	Accepted or reason for reject.
Total Length = 3 bytes				



Login Response – Status Codes	
'A'	Login Accepted
'N'	Not authorised (Invalid Username/Password)
'B'	Session in use
'S'	Invalid Session

Heartbeat

Heartbeat messages must be sent once every five seconds in order to keep the client's connection to the GRP server alive. Heartbeat messages are sent using the Sequenced Unit Header as described in sections 0 and 0.

Gap Request

The Gap Request message is used by a client's process to request retransmission of a sequenced message (or messages) by one of CXA's gap servers.

Gap Request				
Field	Offset	Length	Value/Type	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field.
<i>Message Type</i>	1	1	0x03	Gap Request Message
<i>Unit</i>	2	1	Binary	<i>Unit</i> that the gap is requested for.
<i>Sequence</i>	3	4	Binary	<i>Sequence</i> of first message (Lowest sequence in range).
<i>Count</i>	7	2	Binary	<i>Count</i> of messages requested.
Total Length = 9 bytes				

Gap Response

The Gap Response message is sent by the GRP in response to a Gap Request message. The *Unit* and *Sequence* fields will match the values supplied in the Gap Request message. A Gap Response message, with a *Status* of Accepted or reason for failure, will be sent for each Gap Request message received by the GRP.

Gap Response				
Field	Offset	Length	Value/Type	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field.
<i>Message Type</i>	1	1	0x04	Gap Response Message.
<i>Unit</i>	2	1	Binary	<i>Unit</i> the gap was requested for.
<i>Sequence</i>	3	4	Binary	<i>Sequence</i> of first message in request.
<i>Count</i>	7	2	Binary	<i>Count</i> of messages requested.
<i>Status</i>	9	1	Alphanumeric	Accepted or reason for reject*.
Total Length = 10 bytes				



Gap Response – Status Codes	
'A'	Accepted
'O'	Out of range (ahead of sequence or too far behind)
'D'	Daily gap request allocation exhausted
'M'	Minute gap request allocation exhausted
'S'	Second gap request allocation exhausted
'C'	Count request limit for one gap request exceeded
'I'	Invalid Unit specified in request
'U'	Unit is currently unavailable

* - All non-'A' status codes should be interpreted as a reject.

Gap Server Usage Example

The following diagram shows the exchange of messages over time between a client and CXA's Multicast PITCH feed, Gap Request Proxy, and Gap Server.

At time 0 assume the client state of the book is current through sequence 310170, and the next expected sequence is 310171.

At time 1 the client sends a Login message to the Gap Request Proxy (GRP) server and at time 2 receives a Login Response message indicating the login has been accepted. The client is now successfully logged into the GRP and able to request gaps. Note this is just for example purposes and in practice the client is encouraged to log into the GRP at the start of the trading day.

At time 3 and 4, the client receives sequences 310171 and 310172. These messages are in sequence and the client applies these messages to their book. The state of the book is current through sequence 310172 and the next expected sequence is 310173.

At time 5 and 6, the client receives sequences 310176 and 310177 and determines sequences 310173 through 310175 are missing (i.e., a gap was detected). Sequences 310176 and 310177 are then cached for later use.

At time 7 a Gap Request message is sent to the GRP to request the missing messages, starting at sequence 310173 for a total of 3 messages.

At time 8, the client receives sequence 310178. Since there are still missing sequences, it cannot apply this message to the book and sequence 310178 is cached for later use.

At time 9, the client receives a Gap Response message from the GRP indicating the gap request was successful and it can expect the requested messages to be sent from the Gap Server.

At time 10, the client receives sequence 310179. Since there are still missing sequences, it cannot apply this message to the book and sequence 310179 is cached for later use.

At time 11, the client receives sequence 310173 from the Gap Server. Since the last sequence applied was 310172, the client can apply this message to the book. The state of the book is current through sequence 310173 and the next expected sequence is 310174.




At time 12, the client receives sequence 310180. Since there are still missing sequences, it cannot apply this message to the book and sequence 310180 is cached for later use.

At time 13 and 14, the client receives sequences 310174 and 310175 from the Gap Server. Since the last sequence applied was 310173, the client can apply these messages to the book.

Now that all the missing sequences have been received from the Gap Server, the client can apply the cached sequence messages 310176 through 310180. At this point the book should be current with the PITCH feed. The state of the book is current through sequence 310180 and the next expected sequence is 310181.

At times 15 and 16, sequences 310181 and 310182 are received. Since there are no missing sequences, and these messages are in sequence, the client applies these messages to their book. The state of the book is current through sequence 310182 and the next expected sequence is 310183.

It should be noted that other clients may also request gaps, and the clients should be prepared to ignore any message from the Gap Server it is not expecting or does not need.

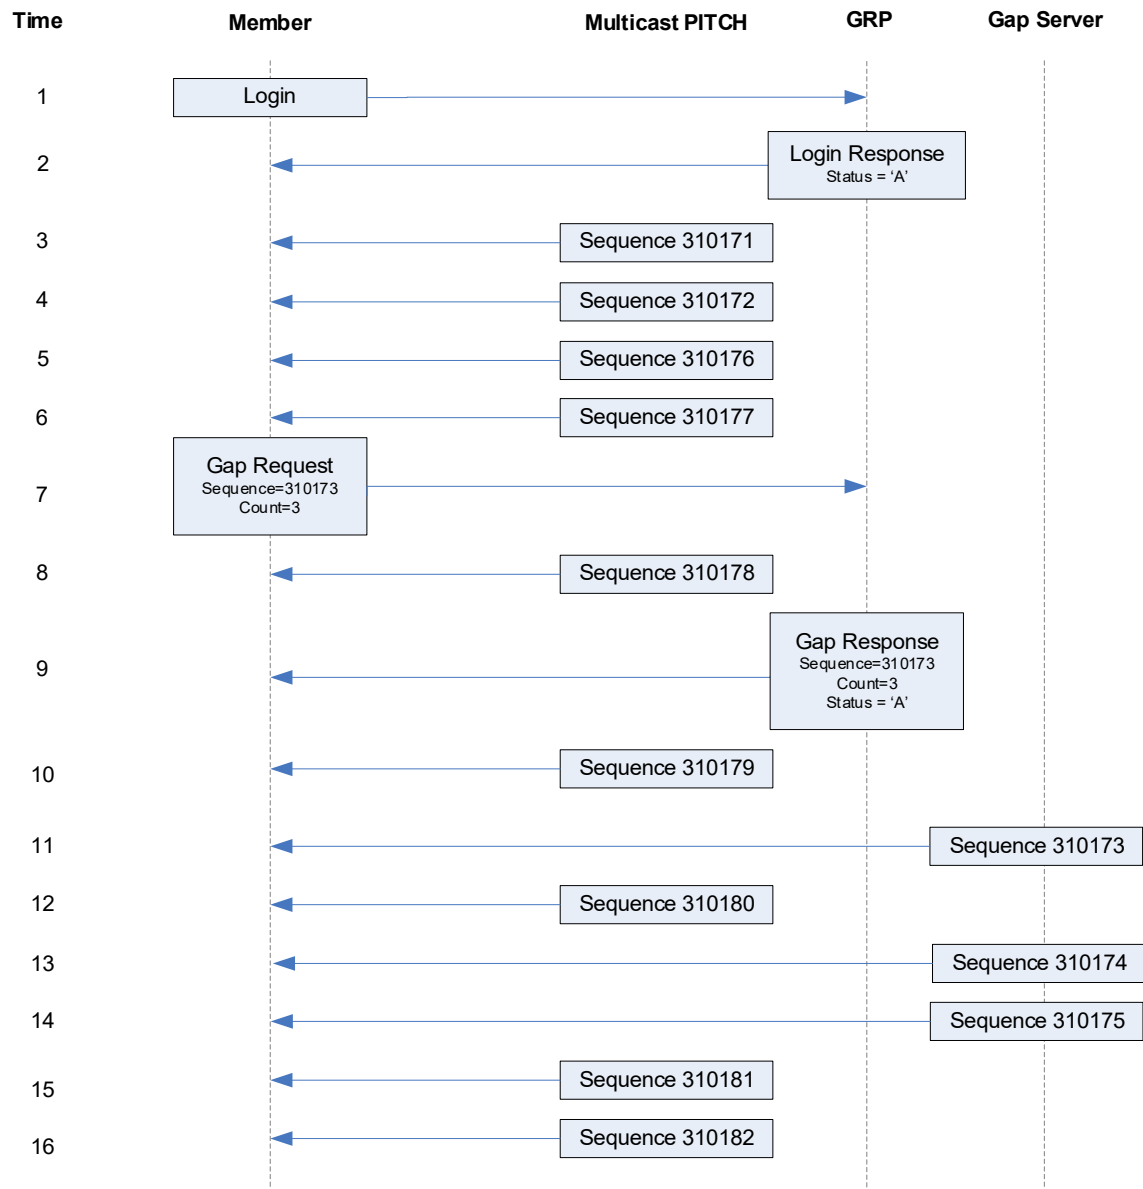



5. Spin Messages

Login

The Login message is the first message sent to the Spin Server by a client's process after the connection to the Spin Server is established. Failure to login before sending any other message type will result in the connection being dropped by the Spin Server.

The format of the Login message for the Spin Server is identical to that of the GRP described previously in [Section 4.1](#).

Login Response

The Login Response message is sent by the Spin Server to a client's process in response to a Login message. The status field is used to reflect an accepted login or the reason the session was not accepted. If login fails, the connection will be dropped after the Login Response message is sent.

The format of the Login Response message for the Spin Server is identical to that of the GRP described previously in [Section 4.2](#).

Heartbeat

Heartbeat messages must be sent once every five seconds in order to keep the client's connection to the spin server alive. Heartbeat messages are sent using the Sequenced Unit Header as described in sections 0 and 0.

Spin Image Available

The Spin Image Available message is sent once per second and indicates through what sequence number a spin is available.

Spin Image Available				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field.
<i>Message Type</i>	1	1	0x80	Spin Image Available Message
<i>Sequence</i>	2	4	Binary	Spin is available which is current through this sequence number.
Total Length = 6 bytes				

Spin Request

The Spin Request message is used by a client's process to request transmission of a spin of the unit's order book. Refer to [Section 1.5](#) for more complete details regarding *Sequence* specification as well as buffering requirements.

Spin Request				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field.
<i>Message Type</i>	1	1	0x81	Spin Request Message
<i>Sequence</i>	2	4	Binary	Sequence number from a Spin Image Available message received by the client.
Total Length = 6 bytes				



Spin Response

The Spin Response message is sent in response to a client's Spin Request message indicating whether a spin will be sent.

Spin Response				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field.
<i>Message Type</i>	1	1	0x82	Spin Response Message
<i>Sequence</i>	2	4	Binary	Sequence number from a Spin Image Available message.
<i>Order Count</i>	6	4	Binary	Number of Add Order messages which will be contained in this spin.
<i>Status</i>	10	1	Alphanumeric	Accepted or reason for reject*.
Total Length = 11 bytes				

Spin Response - Status Codes	
'A'	Accepted
'O'	Out of Range (<i>Sequence</i> requested is greater than <i>Sequence</i> available by the next spin)
'S'	Spin already in progress (only one spin can be running at a time)

* - All non-'A' status codes should be interpreted as a reject.

Spin Finished

The Spin Finished message is sent to indicate that all messages for the spin requested have been sent. A Spin Finished message is only sent if a Spin Request was not rejected. Upon receipt of a Spin Finished message, any buffered multicast messages should be applied to the client's copy of the book to make it current.

Spin Finished				
Field Name	Offset	Length	Type/(Value)	Description
<i>Length</i>	0	1	Binary	<i>Length</i> of this message including this field.
<i>Message Type</i>	1	1	0x83	Spin Finished Message
<i>Sequence</i>	2	4	Binary	Sequence number from the Spin Response message.
Total Length = 6 bytes				

Spin Server Usage Example

The following diagram (see next page) shows the exchange of messages over time between a client and CXA's Multicast PITCH feed and Spin Server. The spin will consist of Trading Status, Calculated Value, Add Order and Auction Update messages.

At time 1, the client has no state of the book and desires to become current. The client caches the received Multicast PITCH messages (sequences 310172 and 310173) for later use. Since the client has no book, they cannot yet be applied.

At time 5, the client has successfully logged into the Spin Server and has cached another message, sequence 310174.

At time 7, the client receives a Spin Image Available message which indicates that the spin server can give them a spin of all open orders as of sequence 310169. The client does not have all messages cached after 310169 (they are missing 310170 and 310171), so this spin is not useful to the client.



At time 10, the client receives a Spin Image Available message which is useful since it would be a spin of all orders up to and including sequence 310175 and the client has all messages after 310175 cached.


At time 11, the client sends a Spin Request for all messages up to and including 310175 and continues to cache Multicast PITCH messages received.

At time 14, the spin server acknowledges the spin request and indicates that three open orders will be sent.

At time 24, the spin server indicates that it has finished sending all open orders. The client must then apply the cached messages from sequence number 310176 through current.

Notes:

- Spin Servers are available for each unit. Clients may need to employ multiple Spin Servers depending upon their architecture.

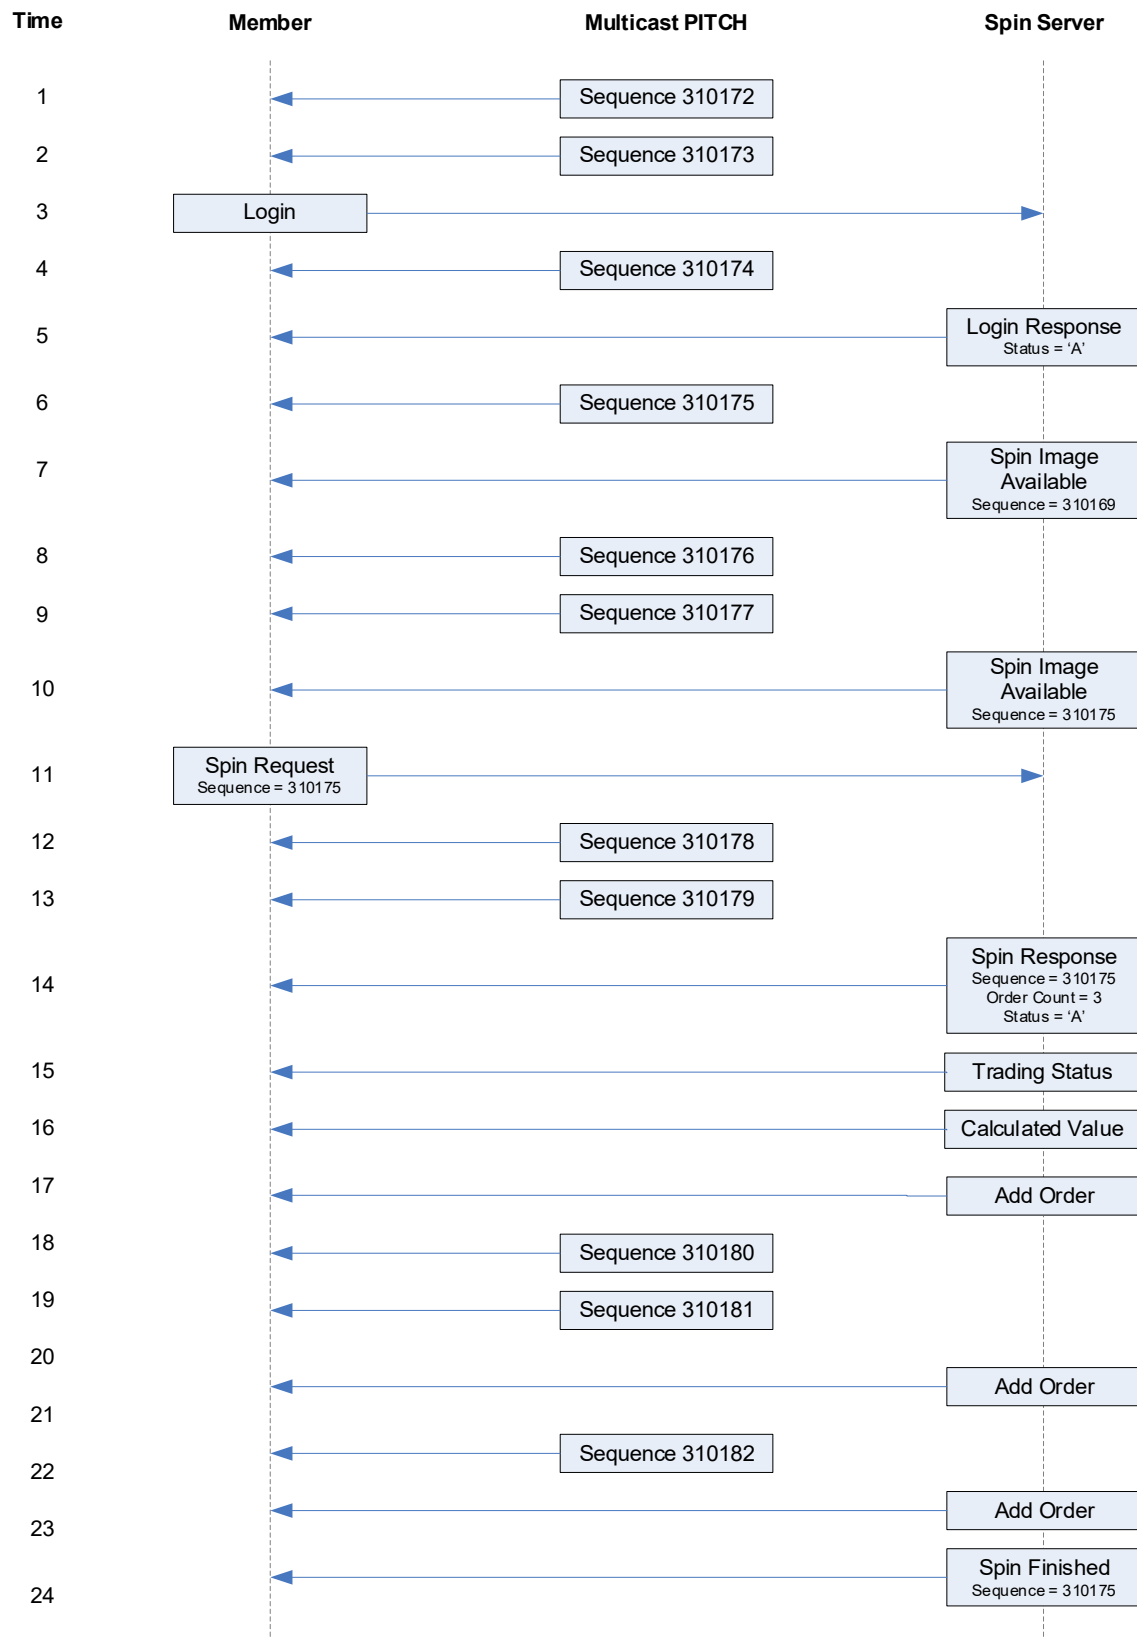

6. Message Types

Gap Request Proxy Messages

0x01	Login
0x02	Login Response



0x03	Gap Request
0x04	Gap Response

Spin Server Messages

0x01	Login
0x02	Login Response
0x80	Spin Image Available
0x81	Spin Request
0x82	Spin Response
0x83	Spin Finished

PITCH Messages

0x97	Unit Clear
0x3B	Trading Status
0x37	Add Order
0x38	Order Executed
0x58	Order Executed at Price
0x39	Reduce Size
0x3A	Modify Order
0x3C	Delete Order
0x3D	Trade
0x3E	Trade Break
0xE3	Calculated Value
0x2D	End of Session
0x59	Auction Update
0x5A	Auction Summary



7. Example Messages

Individual Messages

Each of the following message types must be wrapped by a sequenced or unsequenced Sequenced Unit Header as described in Section 0. Note that in the following examples, each byte is represented by two hexadecimal digits.

Login Message

Length	16	22 bytes
Type	01	Login
SessionSubId	30 30 30 31	"0001"
Username	46 49 52 4D	"FIRM"
Filler	20 20	" "
Password	41 42 43 44 30 30 20 20 20 20	"ABCD00 "

Login Response Message

Length	03	3 bytes
Type	02	Login Response
Status	41	Login accepted

Gap Request Message

Length	09	9 bytes
Type	03	Gap Request
Unit	01	Unit 1
Sequence	3B 10 00 00	First message: 4155
Count	32 00	50 messages

Gap Response Message

Length	10	10 bytes
Type	04	Gap Response
Unit	01	Unit 1
Sequence	3B 10 00 00	First message: 4155
Count	32 00	50 messages
Status	41	Accepted

Unit Clear

Length	06	6 bytes
Type	97	Unit Clear
Reserved	20 20 20 20	(Reserved)



Trading Status

Length	16	22 bytes
Type	3B	Trading Status
Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Symbol	5A 56 5A 54 20 20	"ZVZT "
Trading Status	54	T = Trading
Market Id Code	41 55 53 20	"XASX"
Reserved	00	(Reserved)

Add Order

Length	2A	42 bytes
Type	37	Add Order
Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Order Id	05 40 5B 77 8F 56 1D 0B	631WC4000005 (base36)
Side Indicator	42	B = Buy
Quantity	BC 02 00 00	700 shares
Symbol	5A 56 5A 54 20 20	"ZVZT "
Price	15 CD 5B 07 00 00 00 00	12.3456789
PID	31 32 33 34	"1234"
Reserved	00	(Reserved)

Order Executed

Length	2B	43 bytes
Type	38	Order Executed
Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Order Id	05 40 5B 77 8F 56 1D 0B	631WC4000005 (base36)
Executed Quantity	BC 02 00 00	700 shares
Execution Id	34 2B 46 E0 BB 00 00 00	0AAP09VEC (base36)
Contra Order Id	06 40 5B 77 8F 56 1D 0B	631WC4000006 (base36)
Contra PID	35 36 37 38	"5678"
Reserved	00	(Reserved)

Reduce Size

Length	16	22 bytes
Type	39	Reduce Size
Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Order Id	05 40 5B 77 8F 56 1D 0B	631WC4000005 (base36)
Cancelled Quantity	BC 02 00 00	700 shares



Modify Order

Length	1F	31 bytes
Type	3A	Modify Order
Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Order Id	05 40 5B 77 8F 56 1D 0B	631WC4000005 (base36)
Quantity	BC 02 00 00	700 shares
Price	15 CD 5B 07 00 00 00 00	12.3456789
Reserved	00	(Reserved)

Delete Order

Length	12	18 bytes
Type	3C	Delete Order
Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Order Id	05 40 5B 77 8F 56 1D 0B	631WC4000005 (base36)

Trade (On-Exchange Electronic Execution)

Length	48	72 bytes
Type	3D	Trade
Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Symbol	5A 56 5A 54 20 20	"ZVZT "
Quantity	BC 02 00 00	700 shares
Price	15 CD 5B 07 00 00 00 00	12.3456789
Execution Id	34 2B 46 E0 BB 00 00 00	0AAP09VEC (base36)
Order Id	05 40 5B 77 8F 56 1D 0B	631WC4000005 (base36)
Contra Order Id	06 40 5B 77 8F 56 1D 0B	631WC4000006 (base36)
PID	31 32 33 34	"1234"
Contra PID	35 36 37 38	"5678"
Trade Type	4E	N = Trade from normal matching logic
Trade Designation	43	C = CXAC (Limit)
Trade Report Type	20	" "(space)
Trade Transaction	00 00 00 00 00 00 00 00	zero
Time		
Reserved	00	(reserved)

Trade (Off-Exchange Trade Report)

Length	48	72 bytes
Type	3D	Trade
Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Symbol	5A 56 5A 54 20 20	"ZVZT "
Quantity	BC 02 00 00	700 shares
Price	15 CD 5B 07 00 00 00 00	12.3456789
Execution Id	34 2B 46 E0 BB 00 00 00	0AAP09VEC (base36)
Order Id	05 40 5B 77 8F 56 1D 0B	631WC4000005 (base36)
Contra Order Id	06 40 5B 77 8F 56 1D 0B	631WC4000006 (base36)
PID	31 32 33 34	"1234"



Contra PID	20 20 20 20	Unattributed – all spaces
Trade Type	20	" " (off-exchange)
Trade Designation	20	" " (space)
Trade Report Type	50	P = Large Portfolio Trade
Trade Transaction	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Time		(reserved)
Reserved	00	

Trade Break

Length	12	18 bytes
Type	3E	Trade Break
Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Execution Id	34 2B 46 E0 BB 00 00 00	0AAP09VEC (base36)

Calculated Value

Length	21	33 bytes
Type	E3	Calculated Value
Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch
Symbol	5A 56 5A 54 20 20	"ZVZT "
Value Category	31	1 = Closing price
Value	15 CD 5B 07 00 00 00 00	12.3456789
Value Timestamp	F0 77 BB CE 2A 6A 62 16	1612968348641622000 ns since epoch

End of Session

Length	06	6 bytes
Type	2D	End of Session
Reserved	00 00 00 00	(Reserved)



Order Entry Examples

The following examples demonstrate the CXA Multicast PITCH messages sent in response to various orders entered in CXA.

Modify Order Example

Action	Message Description
A visible order to buy 100 ZVZT shares at 10.00 is entered. The order is assigned Id 100000000001 and rests on the book. An Add Order message with price of 10.00 and quantity of 100 is sent.	Type: 37 (Add Order) Timestamp: 1612968348641622000 (nanos) Order Id (base36): 100000000001 Side: B (Buy) Quantity: 100 Symbol: "ZVZT " Price: 10.00 PID: "1234" Reserved: 0 (Reserved)
The price of the order is modified by the participant from 10.00 to 11.00. A Modify Order is sent with the new price of 11.00.	Type: 3A (Modify Order) Timestamp: 1612968348641623000 (nanos) Order Id (base36): 100000000001 Quantity: 100 Price: 11.00 Reserved: 0 (Reserved)

Undisclosed Order Execution Example

Action	Message Description
An undisclosed order to buy 200 ZVZT shares at 10.00 is entered. The order is assigned Id 1000000000002 and rests on the book. An Add Order message with price of 10.00 and zero quantity is sent.	Type: 37 (Add Order) Timestamp: 1612968348641622000 (nanos) Order Id (base36): 100000000002 Side: B (Buy) Quantity: 0 (undisclosed) Symbol: "ZVZT " Price: 10.00 PID: "1234" Reserved: 0 (Reserved)
A visible order to sell 100 ZVZT shares at 10.00 is entered. This order is executed against the resting undisclosed buy order. Since the resting order is undisclosed a Trade message is sent that includes the quantity executed on the undisclosed order.	Type: 3D (Trade) Timestamp: 1612968348641623000 (nanos) Symbol: "ZVZT " Quantity: 100 Price: 10.00 Execution Id (base36): 01000000A Order Id (base36): 100000000002 Contra Order Id (base36): 100000000003 PID: "1234" Contra PID: "5678" Trade Type: N (Normal) Trade Designation: C (Limit) Trade Report Type: <space> Trade Transaction Time: 0 Reserved: 0 (Reserved)
Another visible order to sell 100 ZVZT shares at 10.00 is entered. This order is executed against the resting undisclosed buy order. Since the resting order is undisclosed a Trade message is sent.	Type: 3D (Trade) Timestamp: 1612968348641624000 (nanos) Symbol: "ZVZT " Quantity: 100 Price: 10.00 Execution Id (base36): 01000000B Order Id (base36): 100000000002 Contra Order Id (base36): 100000000004 PID: "1234" Contra PID: "9123" Trade Type: N (Normal) Trade Designation: C (Limit) Trade Report Type: <space> Trade Transaction Time: 0 Reserved: 0 (Reserved)
The undisclosed order is fully filled and is removed from the book. A Delete Order message is sent.	Type: 3D (Delete Order) Timestamp: 1612968348641624000 (nanos) Order Id (base36): 100000000002



Iceberg Order Execution Example

Action	Message Description
An iceberg order to buy 100 ZVZT shares at 10.00 is entered, with a display quantity of 50. The order is assigned Id 100000000005 and rests on the book. An Add Order message with price of 10.00 and quantity of 50.	Type: 37 (Add Order) Timestamp: 1612968348641622000 (nanos) Order Id (base36): 100000000005 Side: B (Buy) Quantity: 50 Symbol: "ZVZT " Price: 10.00 PID: "1234" Reserved: 0 (Reserved)
A visible order to sell 20 ZVZT shares at 10.00 is entered. This order is executed against the resting iceberg buy order. An Order Executed message is sent with price of 10.00 and quantity of 20. The remaining visible quantity of the iceberg order is 30, with the total quantity of 80.	Type: 38 (Order Executed) Timestamp: 1612968348641623000 (nanos) Order Id (base36): 100000000005 Executed Quantity: 20 Execution Id (base36): 01000000C Contra Order Id (base36): 100000000006 Contra PID: "5678" Reserved: 0 (Reserved)
Another visible order to sell 80 ZVZT shares at 10.00 is entered. This order is executed against the resting undisclosed buy order. An Order Executed message is sent for the remaining visible quantity of 30. At this point the visible quantity of the order is exhausted and participants would remove the order from their books.	Type: 38 (Order Executed) Timestamp: 1612968348641624000 (nanos) Order Id (base36): 100000000005 Executed Quantity: 30 Execution Id (base36): 01000000D Contra Order Id (base36): 100000000007 Contra PID: "9123" Reserved: 0 (Reserved)
A Trade message is sent of the hidden quantity of the iceberg order.	Type: 3D (Trade) Timestamp: 1612968348641625000 (nanos) Symbol: "ZVZT " Quantity: 50 Price: 10.00 Execution Id (base36): 01000000E Order Id: 100000000008 (obfuscated) Contra Order Id (base36): 100000000007 PID: "1234" Contra PID: "9123" Trade Type: N (Normal) Trade Designation: C (Limit) Trade Report Type: <space> Trade Transaction Time: 0 Reserved: 0 (Reserved)

Iceberg Order Replenished Example

Action	Message Description
An iceberg order to buy 75 ZVZT shares at 10.00 is entered, with a display quantity of 50. The order is assigned Id 100000000009 and rests on the book. An Add Order message with price of 10.00 and quantity of 50.	Type: 37 (Add Order) Timestamp: 1612968348641622000 (nanos) Order Id (base36): 100000000009 Side: B (Buy) Quantity: 50 Symbol: "ZVZT " Price: 10.00 PID: "1234" Reserved: 0 (Reserved)
A visible order to sell 50 ZVZT shares at 10.00 is entered. This order is executed against the resting iceberg buy order. An Order Executed message is sent with price of 10.00 and quantity of 50. At this point the visible quantity of the order is exhausted and participants would remove the order from their books.	Type: 38 (Order Executed) Timestamp: 1612968348641623000 (nanos) Order Id (base36): 100000000009 Executed Quantity: 50 Execution Id (base36): 01000000F Contra Order Id (base36): 10000000000A Contra PID: "5678" Reserved: 0 (Reserved)



The iceberg order is replenished with the remaining quantity of 25 shares. An Add Order is sent with an obfuscated (new) order Id.	Type: 37 (Add Order) Timestamp: 1612968348641624000 (nanos) Order Id (base36): 10000000000B (obfuscated) Side: B (Buy) Quantity: 25 Symbol: "ZVZT " Price: 10.00 PID: "1234" Reserved: 0 (Reserved)
--	---

8. Multicast Configuration

Production Environment Configuration

Limitations/Configurations

The following table defines the configuration for network and gap request limitations. These limitations are session-based. CXA reserves the right to adjust the gap request limitations to improve the effectiveness of the gap request infrastructure.

Period/Type	Limit/Setting	Notes
MTU	1500	CXA will send UDP messages up to 1500 bytes. Clients should ensure their infrastructure is configured accordingly.
Gap Response Delay	2 ms	The Gap Server will delay resending sequenced messages via multicast for the specified limit to satisfy multiple GRP gap requests with one multicast response.
Count	100	Any single gap request may not be for more than this number of dropped messages.
1 Second	320 Requests	Maximum number of retransmission requests allowed per second for each session, renewed every clock second.
1 Minute	1,500 Requests	Maximum number of retransmission requests allowed per minute for each session, renewed every clock minute.
Day	100,000 Requests	Maximum number of retransmission requests allowed per day for each session.
Within Range	1,000,000 Messages	Clients' retransmission requests must be within this many messages of the most recent sequence sent by the real-time feed per session.



Unit/Symbol Distribution

The following table describes the CXA symbol distribution across units.

Unit	Symbol Range
1	Zero – M~~~~~
2	N – Z~~~~~

Note – CXA reserves the right to add multicast addresses with prior notice, but no migration period. Notice will be given that the distribution will change on a certain date. Care should be taken to support mappings in these tables via software configuration.

CXA Multicast Routing Parameters

Data Centre	Rendezvous Point
Primary Data Centre A feed	74.115.128.10/32
Primary Data Centre B feed	74.115.128.11/32
Secondary Data Centre E feed	74.115.128.13/32

For additional information about physical connectivity, refer to the [CXA Connectivity Manual](#).

CXA Address/Unit Distribution

The following tables describe the unit distribution across the CXA PITCH feeds.

Primary Data Centre		Gig-Shaped "A" Feed [AAM] 170.137.217.64/28		Gig-Shaped "B" Feed [ABM] 170.137.217.80/28	
Unit	IP Port	Real-time MC	Gap Resp. MC	Real-time MC	Gap Resp. MC
1	30501	233.218.133.8	233.218.133.81	233.218.133.96	233.218.133.97
2	30502	0			

Note – CXA reserves the right to add multicast addresses with prior notice, but no migration period. Notice will be given that the distribution will change on a certain date. Care should be taken to support mappings in these tables via software configuration.

Secondary Data Centre		Gig-Shaped "E" Feed [AEM] 170.137.214.16/28	
Unit	IP Port	Real-time MC	Gap Resp. MC
1	31501	233.218.133.112	233.218.133.113
2	31502		

Note – CXA reserves the right to add multicast addresses with prior notice, but no migration period. Notice will be given that the distribution will change on a certain date. Care should be taken to support mappings in these tables via software configuration.



Certification Environment Configuration

Unit/Symbol Distribution

The following table describes the CXA symbol distribution across units.

Unit	Symbol Range
1	Zero – M ~~~~~
2	N – Z ~~~~~

Note – CXA reserves the right to add units and/or change symbol distribution with 48 hours of notice and no migration period. Notice will be given that the distribution will change on a certain date. Care should be taken to support mappings in these tables via software configuration.

Certification Multicast Routing Parameters

Primary Certification Data Centre	Rendezvous Point
Primary Data Centre feed	74.115.128.12/32

CXA Address/Unit Distribution

The following tables describe the unit distribution across the certification CXA PITCH feeds.

Primary Data Centre		CertFeed [Cert] 170.137.217.16/28	
Unit	IP Port	Real-time MC	Gap Resp. MC
1	32501	233.218.133.104	233.218.133.105
2	32502		

Note – CXA reserves the right to add multicast addresses with prior notice, but no migration period. Notice will be given that the distribution will change on a certain date. Care should be taken to support mappings in these tables via software configuration.



9. Connectivity

Supported Extranet Carriers

CXA may certify a number of carriers to redistribute Multicast data feeds, as defined in the [CXA Connectivity Manual](#). For more information on receiving CXA Multicast PITCH through any of these providers, please contact the vendor noted in the Extranet Providers section of the Connectivity Manual.

Bandwidth Recommendation

The Gig-shaped feeds require 1 Gbps of bandwidth. CXA will use 90% of these respective bandwidths for Multicast PITCH to allow clients to use the same physical connection for order entry if desired.



Revision History

Document Version	Date	Description
1.0.0	08/04/22	Initial version.
1.0.1	27/06/22	Added feed names to PITCH feed descriptions. Updated <i>Market Id Code</i> : 'XASX' = ASX Symbols
1.0.2	15/08/22	Updated Market Id Code in example messages.
1.0.3	26/08/22	Updated symbol distribution ranges to be simple alpha ranges.
1.0.4	31/08/22	Populated PITCH feed addresses in section 8.
1.0.5	01/09/22	Updated symbol range.
1.0.6	07/11/22	Updated <i>Trade Designation</i> values "B" and "I" for BIDS MIC codes.
1.0.7	24/05/24	Added updates related to Auctions: - Trading Status message - Order Executed at Price - Auction Update - Auction Summary Auction updates are temporarily displayed in red font for clarity.
1.0.8	12/09/24	Further clarification for multi-day orders at start of day in the Add Order section. <i>Message Type</i> codes confirmed for: - Order Executed at Price - Auction Update - Auction Summary
1.0.9	26/11/24	Further clarification on the field population and sequence of messages: - Section 3.4.2 – Order Executed at Price - Section 3.9 – Auction Update - Section 3.10 – Auction Summary
1.0.10	15/01/25	Further clarification for auction trades that involve undisclosed orders are disseminated via the Trade message - Section 3.5 – Trade Type field. - SPIN messages include Auction Update messages. Updated with CXA Titanium branding.
1.0.11	07/02/25	Order Conversion Service (OCS): - Re-use of <i>Reserved</i> field in the Trade message to the Flags bit field where bit 1 indicates a trade of a converted order. - No change to Trade message structure or length OCS updates are temporarily displayed in orange font for clarity.
1.0.12	21/03/25	Removed references to BIDS Australia.
1.0.13	03/08/26	Rebrand



Contact us for more information

Trade Desk

+61 2 8078 1701

tradedeskau@cboe.com

Sales

+61 2 8078 1734

au.sales@cboe.com

© TMX Australia Exchange Pty Limited trading as TMX Australia Exchange | ACN 129 584 667. All rights reserved.

Document ID: CXA-PITCH-AUG26, as at 3 August 2026

TMX Australia Exchange is the holder of an Australian Markets Licence to operate a financial market in Australia. This information is provided for informational purposes only. It does not take into account the particular investment objectives, financial situation, or needs of any individual or entity. Under no circumstances is it to be used as a basis for, or considered as an offer to, become a participant of or trade on TMX Australia Exchange or undertake any other activity or purchase or sell any security, or as a solicitation or recommendation of the purchase, sale, or offer to purchase or sell any security. While the information has been obtained from sources deemed reliable, neither TMX Australia Exchange nor its licensors, nor any other party through whom the user obtains any such information: (i) makes any guarantees that it is accurate, complete, timely, or contains correct sequencing of information; (ii) makes any warranties with regard to the results obtained from its use; or (iii) shall have any liability for any claims, losses, or damages arising from or occasioned by any inaccuracy, error, delay, or omission, or from the use of the information or actions taken in reliance on the information. Reproduction or redistribution of this information is prohibited except with written permission from TMX Australia Exchange.